


## AMPLIFIED SPEAKER 2 X 20W 1 slave speaker + 1 master speaker LTS.EC1720W / LTS.EC1720B

Designed to meet many applications or integration, congestion, cost and performance are taken into account. This range of products will allow you to perform quality installations



This wall mount speaker system has an active speaker with a 2x20W @8Ω amplifier and a preamplifier to connect a balanced source line to a Phoenix connector or an unbalanced one to a RCA connector. The bass & treble tone adjustment and the volume control can be done on the rear panel. The passive speaker is connected with a Phoenix connector.

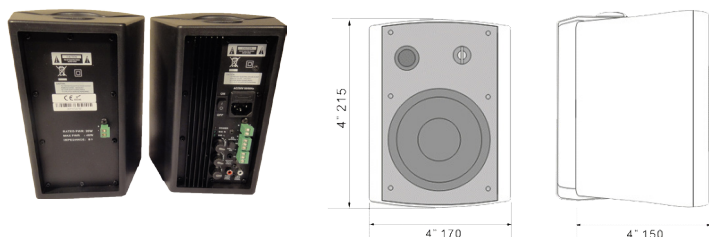

### Applications

- General sound,
- Sport center,
- Public place,
- Place of worship,
  - Shop,
  - Restaurant,
- Meeting room, ...

### Specifications

Input sensitivity	0.5V
Frequency response	80 Hz - 18 kHz / 1W, ±0.5 dB
THD	>200 @ 8Ω / 40 0Hz
S/N ratio	> 95 dB
Amplifier	AB class
Control of bass and treble	±10 dB
Input plug	Balanced terminal, 3.50 mm stereo RCA and headphone input
Power supply	~ 240V / 50 Hz
Dimensions	170 × 150 × 215 mm
Weight	2.2 kg (per pair)