

36x3W PROJECTOR LED LTL.PL363UV Operation manual



TABLE OF CONTENTS

1. About this product.....	Page 3
2. Safety instructions.....	Page 3
3. Specifications.....	Page 3
4. Operation instructions.....	Page 4
5. DMX channels list.....	Page 5
6. Master / slave mode.....	Page 5

1. ABOUT THIS PRODUCT


Thank you for purchasing this product. Please read this manual and keep it for future use. This LED projector is covered with aluminum that supports high temperatures. It uses UV LED, high power with a long life, low power consumption. This model embeds the strobe functions, dimmer, ...

2. SAFETY INSTRUCTIONS


1. Pay attention to the power and make sure that the voltage used is adapted
2. Contact a qualified professional before embarking on any projector repair
3. Do not attach the projector lights when it is on.
4. Do not shake the projector
5. At the first use, check the package to make sure it has suffered no shock.

3. SPECIFICATIONS

- 36 high performance LED - 3W - UV color
- AC 220 - 240V
- Power supply : 115W
- Resistance : $> 2M\Omega$
- DMX512 signal
- Control mode : Master / slave - DMX - sound - auto run
- 3 channels
- Beam angle : 45°
- Dimensions : 254 x 254 x 410 mm
- Weight : 3.5 kg

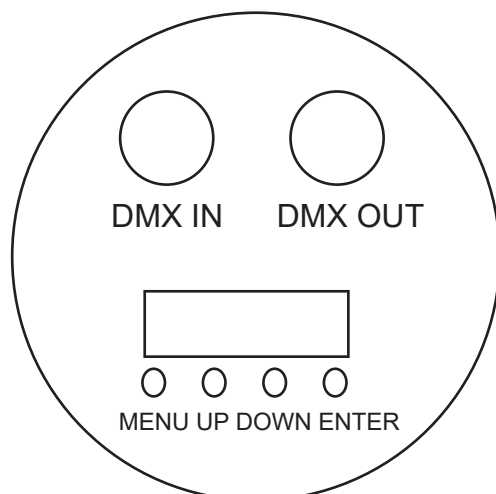

MENU : To access the menu or return to a previous option
UP
DOWN
ENTER : Select an option

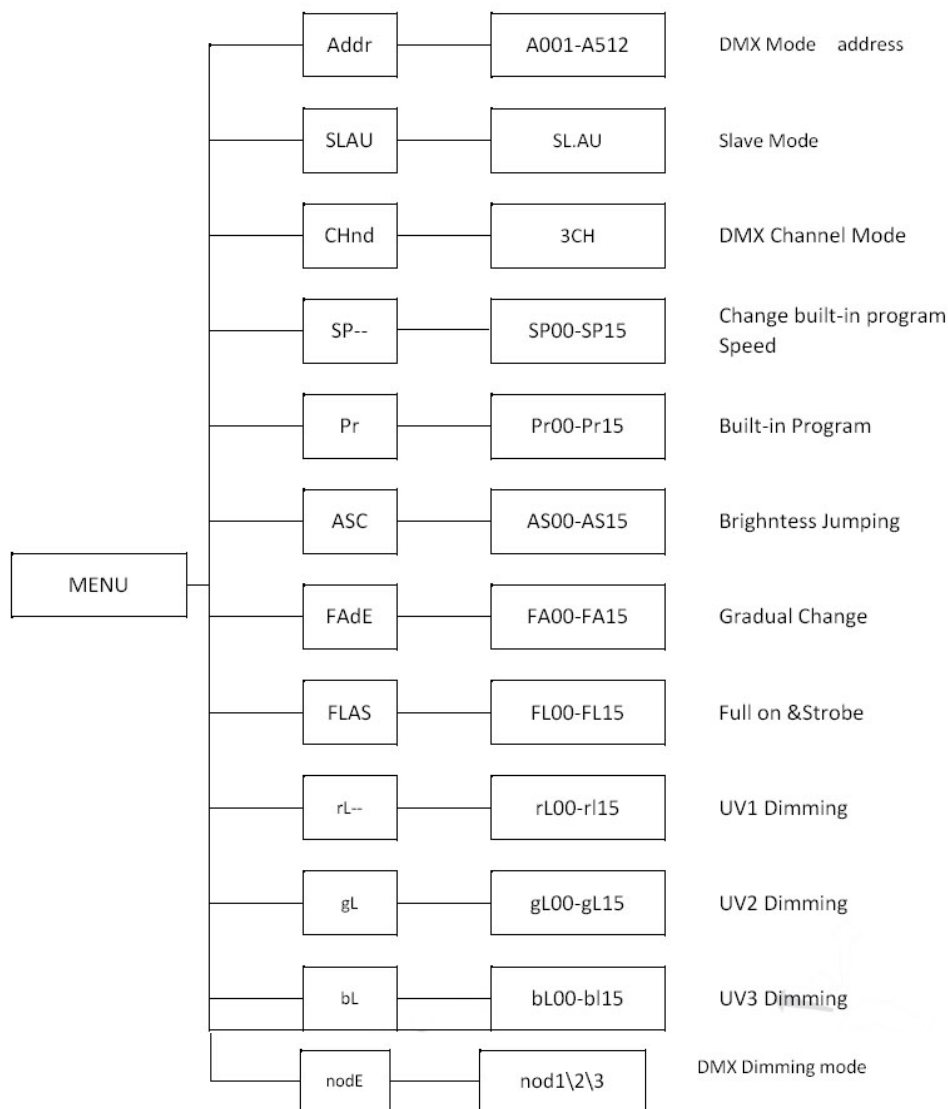

4. OPERATION INSTRUCTIONS

1. MENU is used to access the menu or return to a previous option. This key can not be used to select an option. Press UP and DOWN to select the desired menu (CF menu diagram)

2. Press ENTER to access menu settings. The changes made are automatically saved, which means that during the next use, the settings will be the same.

For example, here's how to select the DMX mode A001:

- Press MENU
- Press UP / DOWN until find ««Addr»»
- Press ENTER to select, the screen will start flashing
- Press UP / DOWN until see A001
- Press ENTER to select and keep the option. DMX mode will automatically be stored and the screen will stop flashing.

5. DMX CHANNELS LIST

CHANNEL	Values DMX	Function
1	0 - 255	Dimmer 0 - 100%
2	0 - 255	UV Dimmer 0 - 100%
3	0 - 255	Strobe 0 - 100%

6. MASTER / SLAVE MODE

Master : Can be programmed for all modes except DMX. He sends orders from the output signal. A single projector can have the MASTER function, others are slave.

Slave: Configure slave lights in the DMX mode. An amplifier is needed if the cable distance between the DMX controller and the light is greater than 60m.

LINEARLEDS



Linear Technologie • 11 rue du Puits Rochefort • 42 100 Saint-Etienne
Tél: +33 (0)4 77 81 49 49 • Fax: +33 (0)4 77 81 49 40 • www.lineartech.fr