

CD / MP3 / USB PLAYER LTS.CDPRO Operation manual



TABLE OF CONTENTS

1. Safety precautions.....	Page 3
2. Description.....	Page 3
3. Specifications.....	Page 4
4. Front panel.....	Page 4
5. Rear panel.....	Page 5

1. SAFETY PRECAUTIONS

When installing the unit :

- Do not expose the unit to rain or an environment where it may be splashed by water or other liquids, as doing so may result in fire or electric shock.
- Use the unit only with the voltage specified on the unit. Using a voltage higher than that which is specified may result in fire or electric shock.
- Do not cut, kink otherwise damage nor modify the power supply cord. In addition, avoid using the power cord in close proximity to heaters, and never place heavy objects - including the unit itself - on the power cord, as doing so may result in fire or electric shock.
- Avoid installing or mounting the unit in unstable locations, such as on a rickety table or a slanted surface. Doing so may result in the unit falling down, causing personal injury and / or property damage.
- Never connect the power supply with wet hands.
- Do not block the ventilation outlet.

When the unit is in use :

- Should the following irregularity be found during use, immediately switch off the power :
 - If you detect smoke or a strange smell coming from the unit.
 - If water or any metallic object gets into the unit.
 - If the unit falls or the unit case breaks.
 - If the power supply cord is damaged (exposure of the core, disconnection, etc.)
 - If it is malfunctioning (no tone sounds.)

2. DESCRIPTION

This CD / USB / MP3 player 1U has, in the front face, an integrated disc loader type «slot» anti shock. An LCD display, wide and full, informs the user of the read current state.

The CDPRO embeds all useful functions for professional use as :

- Auto pause
- Play single or continuous
- Pitch knob +/- 12 with return to zero by pressing the knob
- USB port and USB / CD switch in the front face
- Full function Loop
- Direct access to the first 10 tracks through the knob
- Program selection key


On the rear panel, the CDPRO offers a balanced stereo XLR output with adjustable level on by channel or RCA and an output for headphone with adjustable volume and a SCHUKO type power connector.

This player reads CD formats / CD-R / CD-RW / MP3 / USB. An IR remote control (optional) incorporates the functions of CDPRO.

3. SPECIFICATIONS

Frequency response	20 Hz ~ 20 KHz
Distortion	< 0.01%
S/N ratio	96 dB
Sampling	44.1 kHz
Audio output	XLR symmetric 200 mV and RCA 200 mV
Headphone output	Jack 6.35 stereo 200 mV
Dynamic range	<98 dB
Supply	AC 100 ~ 240V - 50 / 60 Hz
Power consumption	9 - 16W
Dimensions	(19" x 1U) 483 x 250 x 44.5 mm
Weight	3.90 kg

4. FRONT PANEL

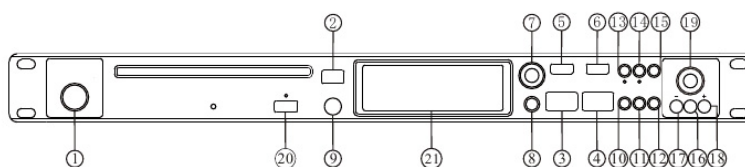

1. Power switch : Press the button. The red light indicates the unit is on.
2. Eject key : Press this button to load or eject a CD.
3. CUE key : Press this button to save the current search point as the starting point of the next search.
4. Play / Pause
5. Back key
6. Skip forward key
7. Track selection key
8. Remote control : Infrared receiver for remote control.
9. Switch to switch from CD to USB function
10. Repeat key
11. Single / continuous mode
12. Time key : To select the time mode.
13. IN key : To stall the start of the loop.
14. OUT key : To stall the end of the loop.
15. To launch the last programmed list
16. Pitch key
17. Punctual slowdown key
18. Punctual acceleration key
19. Control pitch
20. USB input
21. LCD display screen

5. REAR PANEL



1. Power supply input
2. Right symmetric output : XLR audio output.
3. Left symmetric output : XLR audio output.
4. & 5. Output level adjustment keys
6. Analog output jack
7. Jack headphone plug 6.35 mm
8. Headphone volume control

LINEARSOUND



Linear Technologie • 11 rue du Puits Rochefort • 42 100 Saint-Etienne
Tél: +33 (0)4 77 81 49 49 • Fax: +33 (0)4 77 81 49 40 • www.lineartech.fr