


REMOTE CONTROL PANEL LTS.RCP1 LTS.RCP1

This digital matrix range new permits to realise multizones and multisources installations. This range offers many command and extension possibilities.

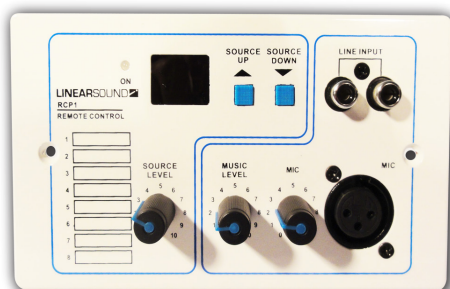

This remote control panel for MA88, permits to deport locally, in a selected area, level control of one of 8 selected sources or to select local inputs, Line and Mic (each has a level control). Visual control of active selection is made by the screen. The connection with the matrix MA88 is made by CAT5 cable. The maximum distance between remote and matrix is 50m. This length can reach 1 000m in addition with a remote power supply in 24V DC. This product can be mounted in a wall or in a wall box.

Specifications

Communication speed	4800 bps
Communication port	RJ45
Communication protocol	RS485
MIC input sensitivity	5 mV / 600 Ω
Phantom power supply	+12V
AUX input sensibility	350 mV / 10k Ω
Audio output	0 dB / 600 Ω
Frequency response	50 Hz ~ 18 kHz (± 1 dB)
S/N	MIC : > 65 dB AUX : > 75 dB
THD distortion	< 0.1% @ 1 kHz
Power supply	DC 24V
Power consumption	5W
Weight	500 g
Dimensions	146 x 48 x 86 mm