


Pre-amplifier 10 inputs - 2 carillon zones LTS.P102

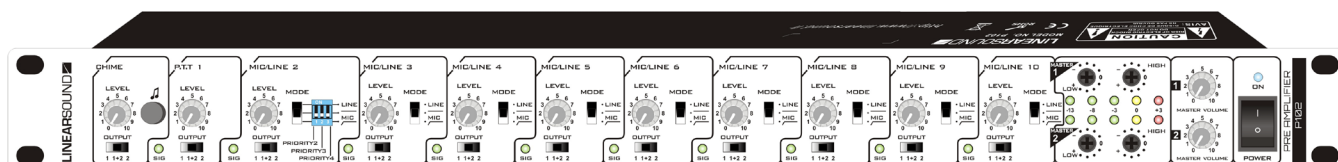

This new range of professional preamplifiers provides opportunities for polyvalent and efficient uses.

This compact preamplifier meets all mixing needs for background sound systems, conference rooms, malls, ... Ideally equipped, this compact and complete mixer will allow you to perform quality installations.

Each of the 10 inputs can be allow on one other or on the all of 2 areas. On the front face, there is the level of control of 2 or 4 carillon tones, for inputs 1 to 10, a level control, a MIC / LINE switch, signal indicator light, private. In addition, input N° 2 has a DIP switch priority selector. Each of the two outputs have a bass setting, acute and a bargraph level indication.

On the rear, are the XLR and RCA connectors of 7-10 inputs, XLR connectors of the 2 outputs, RCA REC connectors and the 24V power supply terminal if necessary and finally the remote connector to the carillon.

Specifications

Input sensitivity / impedance	MIC / Line : $\pm 245\text{mV}$ / $5\text{k}\Omega$ balanced Line RCA In : 500mV / $5\text{k}\Omega$ balanced
Output level / impedance	Master 1, 2 : $+4\text{dBu}$ / 200Ω balanced REC : 0dBu / $10\text{k}\Omega$ unbalanced
Frequency response	20Hz - 20kHz ($\pm 1\text{dB}$)
S/N Ratio	MIC : $> 60\text{dB}$; LINE : $> 75\text{dB}$
THD : MIC	$< 0.05\%$; LINE : $> 0.03\%$
Crosstalk	MIC : $> 60\text{dB}$; LINE : $> 75\text{dB}$
Power consumption	13W
Power supply	230V / 50Hz & DC 24V
Dimensions	484x295x44mm
Weight	3.90kg

Rear pannel

