


AMPLIFICATEUR

LTS.A1000L

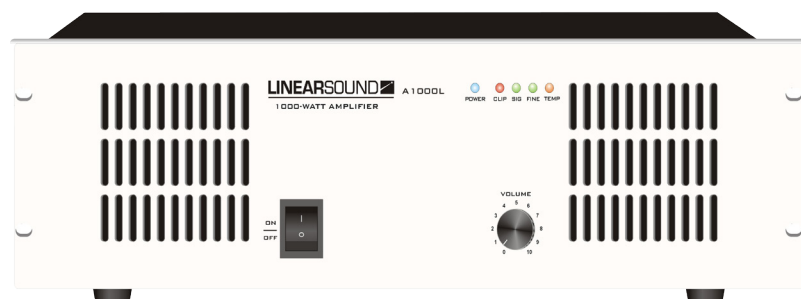

Is part of the good quality professional range of amplifiers. It can be rack-mounted (3U for A1000L) It offers 4 outputs (50V, 70V, 100V & 4 - 16 Ω), 1 balanced or not input and output (XLR connector or 6.35 mm jack) It is totally protected against short-circuit, overheat et overload.

Specifications

| | |
|--------------------|--|
| Rated power output | 1000W |
| Speaker outputs | 50V, 70V, 100V & 4 - 16 Ω |
| Input connectors | XLR3 and balanced jack |
| Input sensitivity | 775 mV / 10 k Ω |
| Output sensitivity | 775 mV / 470 Ω |
| Frequency response | 50 Hz ~ 16 kHz (+1 dB, -3 dB) |
| S/N ratio | > 90 dB |
| THD + N | < 0.3% @ 1 kHz, 1/3 rated power |
| Protection | Overheat, overload, clip & short circuit |
| Power supply | ~230V / 50 Hz or DC 24V |
| Power consumption | 1500W |
| Dimensions | 483 x 353 x 134 mm (19" x 3U) |
| Weight | 26 kg |