


## CEILING SPEAKER 30W 2 CLOSE VOICES LTS.PL2030C



This product is the guarantee of a perfect quality diffusion because it overcomes the sound constraints due to the housing. Whatever false ceiling nature, the sound quality of this speaker will be the same. This range innovates with its attachment mode by ear rotation pinch the false ceiling. It answers to your quality requirements, intelligibility and price.

The design very actual allows you to succeed all your integrations.

This 30W ceiling speaker is equipped with a boomer 6" and a 0.5 Mylar engine.

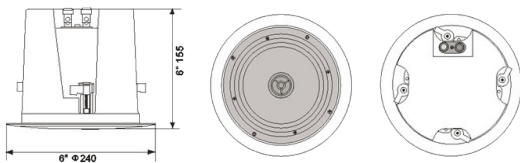

### Applications

- General sound,
- Public places,
  - Resorts,
  - Malls,
- Holiday center,
  - Hospitals,
- Restaurants, pubs,
  - Sport centers,
- Convention centers, ...

### Specifications

Frequency response	100Hz – 20 kHz
Power taps 100V	0.75W / 1.5W / 3W / 6W
SPL max.	102 dB @ 100V 15W
Sensitivity	89 dB (+/- 3 dB)
Power supply	30W
Materials	ABS
Color	White RAL 9016
Dimensions housing	Diameter 210 mm
Dimensions	240 x 155 mm
Weight	2.10 kg