


CEILING SPEAKER 6W CLOSE WATERPROOF LTS.PLW126C

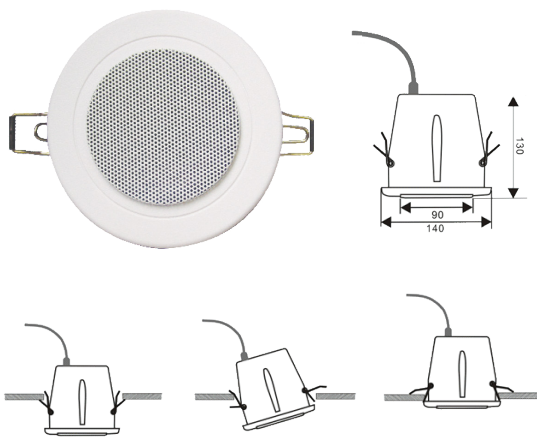

This ceiling speaker is the warranty of a quality diffusion, because it overcomes the sound constraints due to the housing. Whatever the false ceiling nature, the sound quality is the same. This range innovates with its ear rotation attachment mode coming pinch the false ceiling. It also answers to your requirements in term of quality, intelligibility and price. The very actual design will allow you to succeed in every of your integrations.

This 6W ceiling speaker is IP 55 waterproof. It is made to be installed in wet areas. It has a 4" loudspeaker.

Applications

- Residential
- General sound,
- Public places,
 - Resorts,
 - Malls,
- Holidays center,
 - Hospitals,
- Restaurants, pubs
 - Sport centers,
- Convention centers, ...

Specifications

Frequency response	150 Hz – 18 KHZ
Max. SPL	95 dB to 100V 3W
Sensitivity	91 dB (+/- 3 dB)
Power supply	6W 3 / 6W
Line	100V
Materials	ABS
Color	White RAL 9016
Dimension housing	Diameter 125 mm
Dimensions	140 x 130 mm
Weight	0.90 kg