


4 CHANNELS MIXER AMPLIFIER & MP3 PLAYER LTS.MAA4120U

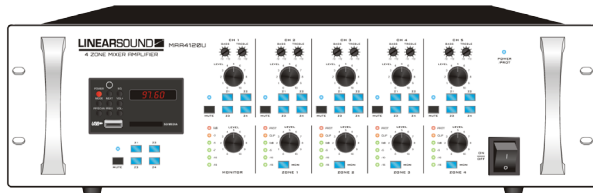

The 4 channel mixer amplifier range is design with two power outputs : 4 x 60W and 4 x 120W. The inputs and outputs can be matrix selected, thus it is a high integrated 4 channel audio matrix system solution with MP3 player for hotel, shopping mall, sports center, entertainment center, ...

Each inputs could be easily designed to different four zones by front panel selector, moreover each inputs are supplied with separated bass, treble and volume control for precise sound effect for each area.

There are combo MIC / line inputs with selector and phantom power, thus the microphone input support both phone jack and XLR type. Two RCA type line inputs, built-in MP3 player on front panel, one phone input and one RJ45 port for a remote paging microphone.

Specifications

Power output	4 x 120 W
Speaker output	4 ohms, 70V / 100V
Input sensitivity & impedance	Channel 1, 2 and 3 : $\pm 2,5$ mV / 600 Ω , 175 mV / 10K Ω , balanced input Channel 5 and 6 : 350 mV / 10K Ω , balanced input Phone : 350 mV / 10K Ω Remote MIC : ± 387 mV / 10K Ω
Monitor output	1 W / 8 Ω
Tone control	Bass : ± 10 dB at 100 Hz / Treble : ± 10 dB at 10 KHz
S/N ratio	≥ 65 dB
Line 1 - 4 output	1V / 600 Ω (balanced output)
Frequency response	80 Hz - 16 KHz (0 / -3 dB)
MP3	Support MP3 format, max. capacity of 32 Gb
Recording format	WAV
Type SD file	FAT16 or FAT32, disk zone support 1, unsupported file, accepts files up to 2Gb, max. playable file 65534, file list up to 100 by unicode
THD	$\leq 1\%$
Protection	Overheat, short-circuit, clip and overload
Power consumption	750 W
Power supply	230V 50 Hz
Dimensions	430 x 399 x 132 mm (3U 19")
Weight	12 kg