


PLAYER SPEAKER AND MP3 MIXER

LTS.PA4060SDT

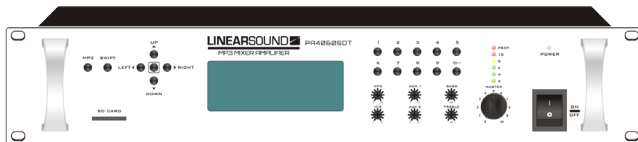

The PA4060SDT series amplifiers power output of 60W, 120W to 240W. The shining feature of this amplifier is integration together with a weekly timer and MP3 player.

Thus end-user can conveniently program over the MP3 file whether it is voice message for advertisement or music song for background music. All in one economy solution for school, shopping mall, super market, school where repeated activities are happened.

Specifications

Power output (THD 1%)	60W and 240W
Speaker outputs	70V, 100V, 4 - 16Ω
MIC input sensitivity / Impedance	5 mV / 600Ω
AUX 1-2 input sensitivity / Impedance	350 mV / 10K Ω
S/N ratio	≥ 66 dB
Frequency response	50 Hz - 18 KHz (+ 3 dB)
SD file system	Support both FAT16 and FAT32, do not support file format. Supports up to 2G-1 bytes as the file size. The maximum number of playable files is 65534. Sorts and plays up to 100 files in the order of UNICODE
MP3 format	Supports MPEG audio 1, 2 and 2.5. Supports layer 1,2 and 3. Supports sample rates 8k, 16k, 32k, 11.025k, 22.05k, 44.1k, 12k, 24k and 48 kHz. Supports bit rate 8 to 320 KBPS and VBR (variable bit rate) Except free format.
Tone	Bass : ± 10 dB at 100 Hz Treble : ± 10 dB at 100 Hz
THD	≤ 0,1 % to 1 KHz, 1/3 rated power
MP3	Support MP3 format, max. capacity of 32G
Pre output	1V / 600 ohms
Program step	Total 512 steps, 1 day ≤ 200 steps
Time mode	24 hours (h – mn – s) weekly
Power supply	110V / 60 Hz or 230V 50 Hz
Power consumption	100W
Dimensions	484 x 358 x 88 mm (2U height)
Weight	12,9 kg