

## INFRARED HEATER


### LC3.IRR25



This heater is compatible with international standards IEC 61603-7 and IEC 60914. It can be mounted in 3 different ways:

- On base,
- On the wall,
- On the ceiling.

With the full power or half power switch, the radiator can be used in large conference rooms, medium or small.

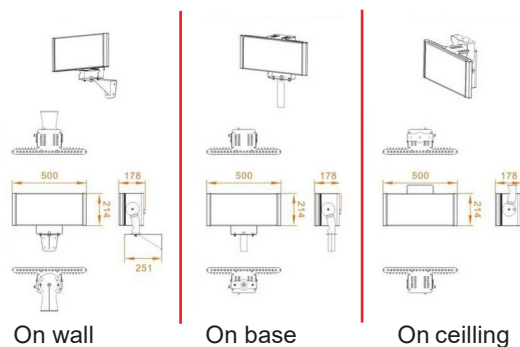

## Specifications

Modulation mode	Digital wireless base station
Frequency range	2 - 8 MHz
Audio processor	IR-DSP
Infrared radiation	25W
Power supply	AC 110 / 220V
Operating temperature	0 - 40°C
Radiance distance	50m
Radiance angle	Horizontal $\pm 40^\circ$ - vertical $\pm 22^\circ$
Max. consumption	1700 mA
Min. consumption	80 mA
Input impedance	75 $\Omega$
Cooling	Convection cooling
LED display	Power / signal
Dimensions	500 x 214 x 178 mm
Weight	5.20 kg (without power cable)
Associated products	LC3.IRTX / LC3.IRRC08 / LC3.IRH