

AMPLIFIER 2 X 20W

LTS.A220

This mini D-class professional mixer amplifier is specifically designed for small congestion sound applications.


Compact, reliable, complete and polyvalent, the A220 is ideal for fixed or mobile installations.



This mini-amplifier offers :

- For Class-D amplifier part : Two (20W, 4 & 8Ω) outputs and volume control for each channel
- For mixing part : Two (balanced - MIC/LINE) inputs with 2-band tone control

This amplifier can be bridged and has a limiter. It can be wall-mounted or set horizontally

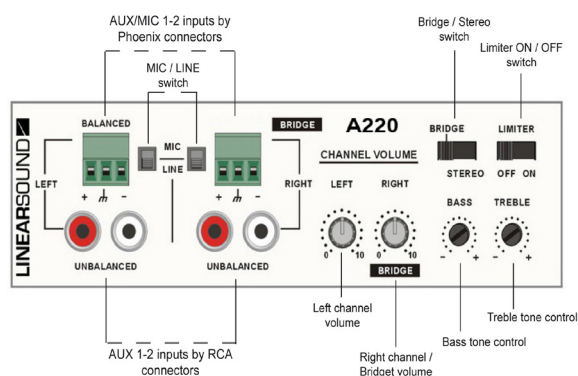

Applications

- Audiovisual integration and presentation,
 - Background music system,
 - Hotel, restaurant,
 - Resorts, shops,
 - Sport center,
 - Public space, ...

Specifications

Rated power output	2 x 20W
Speaker outputs	4Ω or 8Ω
Input	2 inputs RCA AUX and 2 MIC/lines with phoenix connector
Input sensitivity	5 mV / 600Ω
Frequency response	50 Hz ~ 18 kHz (±2 dB)
S/N ratio (line)	> 85 dB
THD + N	< 0.1% @ 1 kHz, 1/3 rated power
Protection	Fuse, overload and short circuit
Power supply	DC 24V
Dimensions	230 x 140 x 57 mm
Weight	0.90 kg